Form Approved REPORT DOCUMENTATION PAGE OMB No. 0704-0188 Public reporting burden for this collection of information is estimated to average one hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden to Washington Headquarters Services. Directorate for Informtion Operatins and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget. Paperwork Reduction Project (0704-0188). Washington, DC 20503. 1. AGENCY USE ONLY (Leave blank) 2. REPORT DATE 3. REPORT TYPE AND DATES COVERED 2/29/96 12/1/94 - 11/30/95 4. TITLE AND SUBTITLE 5. FUNDING NUMBERS A Towed Acoustic Doppler Current Profiler System ONR N00014-95-1-0235 6. AUTHOR(S) Nancy A. Bray, Associate Research Oceanographer 7. PERFORMING ORGANIZATION NAMES(S) AND ADDRESS(ES) 8. PERFORMING ORGANIZATION Center for Coastal Studies REPORT NUMBER Scripps Institution of Oceanography University of California, San Diego 9500 Gilman Drive La Jolla, CA 92093-0209 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) 10. SPONSORING/MONITORING AGENCY REPORT NUMBER Office of Naval Research

11. SUPPLEMENTARY NOTES

800 North Quincy Street Arlington, VA 22217-5660

DURIP Grant for purchase of equipment

12a. DISTRIBUTION/AVAILABILITY STATEMENT

12b. DISTRIBUTION CODE

No Restrictions


13. ABSTRACT (Maximum 200 words)

See Attached

19960311 163

14. SUBJECT TERMS ADCP/CTD System, Towe	15. NUMBER OF PAGES 13		
			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT
No restrictions	No restrictions	No restrictions	

DISCLAIMER NOTICE



THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

Final Report for Grant #N00014-95-1-0235

Principal Investigator: Nan Bray

Expiration Date: 11/30/95

Summary

This grant covered the cost of acquiring a complete towed ADCP/CTD system, assembling it and doing preliminary tests. The system has subsequently been used very successfully as part of the ONR-funded program "A Towed Acoustic Doppler Current Profiler System," to collect upper ocean profiles of current in the data-scarce eastern Indonesian Archipelago. A cruise report is appended. The system was designed particularly for use on foreign research vessels not equipped with hull-mounted ADCPs nor underway CTD profiling capability.

Description of the equipment

We purchased the towed body from ENDECO: their V-Fin CPV. Specially-faired 7-conductor cable and a shock-absorbing bungee cord were also purchased from ENDECO. We had to modify the shock-cord, as the one we purchased failed after 3 days of towing at a speed of 10 kt. The modifications allow for multiple wraps of the shock cord, while distributing the load evenly over all wraps. Otherwise, the fish and cable worked very well, without any major modifications.

The ADCP is a 153-kH broadband system purchased from RDI. We purchased from RDI the required 90 degree angle to orient the transducer head down, while leaving the pressure case in a horizontal position, as required for mounting it in the fish. The RDI system functioned well on both the test cruise and the science cruise.

We purchased an Ocean Sensors CTD OS200 to mount inside the towed fish. This CTD is a small, internally-recording instrument. It is not as inherently accurate as the larger systems like SeaBird and NBIS, but has the great advantage of being small enough to fit easily inside the fish and not change the dynamic balance of the towed body. The OS CTD worked well on both the test cruise and science cruise.

Ancillary equipment purchased on this grant included redundant GPS navigation systems from Garmin, three portable PCs to log the data, electronic test equipment, and a large hard drive for data storage. The entire package works very well as a system. It will be used by Dr. Andreas Munchow (Rutgers University) in June of this year, and again in early 1997 for a repeat survey in eastern Indonesia.

Attachment: Cruise Report (SP95)

Cruise Report

ARLINDO Phase II Shallow Pressure Array Deployment/ADCP (SP 95)

R/V Baruna Jaya

Kupang to Jakarta

4-18 December 1995

Nancy A. Bray Susan Hautala

University of California, San Diego Scripps Institution of Oceanography Center for Coastal Studies, 0209 9500 Gilman Drive La Jolla, California 92093-0209 The cruise had two objectives: to deploy 8 shallow-pressure gauges at various sites in Nusa Tenggara and to conduct towed ADCP/CTD surveys between those sites. Both of the objectives were met. The ship functioned well, the instrumentation worked correctly, and the crew were most helpful in accomplishing the tasks. The shallow pressure sites are listed in Table 1. ADCP surveys are listed in Table 2. The cruise track is sketched in Figure 1.

The SP95 cruise leg began in Kupang on the 3rd of December, immediately following the second JADE95 cruise. [The two pressure sensors in Ombai Strait (Figure 2) were deployed on that leg; no ADCP transects were done]. From Kupang, we steamed to Roti and conducted four ADCP transits of Timor Passage. On the morning of the 6th, we surveyed and deployed the shallow-pressure gauge for Roti on the small island of Ndao (Figure 3). We then transited to the south of Sumba Island, running the ADCP most of the way. The last third of the transit does not have ADCP data because of a mechanical problem with the cable, which was fixed the next day. On the 7th we surveyed, and on the 8th we deployed the gauge at S. Sumba (Figure 4). That night we transited along the north side of Sumba, and the morning of the 9th surveyed and deployed the pressure sensor on the north side of Sumba (south side of Sumba Strait--Figure 5). That night we ran the ADCP across Sumba Strait and across Sape Strait. The morning of the 10th we surveyed and deployed the sensor on the south side of Sumbawa (north side of Sumba Strait--Figure 6). That night we crossed Sumba Strait twice more, running the ADCP, and then steamed for Lombok. Because of heavy wind and swell on the Indian Ocean side of the islands, we steamed north through Selat Alas, and along the north side of Lombok to the pressure sensor site off Gili Trewangan (Figure 7). The Lombok gauge was surveyed and deployed on the morning of the 12th. We then steamed across Lombok Strait (no ADCP) and surveyed the Bali gauge site that same afternoon. That night we did 6 ADCP transits of Lombok Strait, on a line connecting the two pressure sensor locations. The morning of the 13th we deployed the Bali gauge (Figure 8). We then ran 2 ADCP transits of Lombok Strait, intending to do 6 transits. However, bad weather (30knot winds from the NW) terminated the work. We pulled the ADCP out of the water at 1900 CIT and began steaming to port.

Although the ADCP and CTD data are preliminary, and will require calibration and further processing, a general pattern of near-surface circulation is evident. The flow in most of the passages was from the Indian Ocean into the interior seas in the top 100 m of the water column. The only exception was in the center of Timor Passage, where the flow was into the Indian Ocean. From Roti to Sumba and across Sumba Strait, the flow was strongly east and northward. Flow through Selats Sape, Alas, and Lombok was northward, reaching a velocity of 1.5 m s⁻¹ in Lombok. Along the south coast of Sumbawa, the flow was eastward at about 1 m s⁻¹. Below about 100 m the flow was westward or northward in the passages: that is, in the direction expected for the throughflow. In Lombok Strait, during the first set of 6 transits, flow at the surface was 1.5 m s⁻¹ to the northeast, while flow at 150-m depth was 1 m s⁻¹ to the southwest, corresponding to 5 knots of shear over the top 150 m. In general, the water properties from the towed CTD are consistent with the following interpretation of the velocity data. It appears that the S. Java Current occupies the top 100 m or so of the water column and is quite well-developed along the south coast of Java, Bali, Lombok, Sumbawa, and possibly even Sumba. It is characterized by velocities of 1 m s⁻¹, salinity around 33.5 and temperature of 28.7. Below that relatively less dense current, the throughflow was still flowing toward the Indian Ocean. The S. Java Current flows northward through all the interisland passages we observed, and strongly eastward through Sumba. This circulation pattern has not been observed previously. In Timor Passage, throughflow occupied the middle section of the passage, while relatively warm, saline Indian Ocean water appeared near the surface on the south end of the transect.

The data from the pressure gauges will be recovered in about a year. The original ADCP and CTD data are with Dr. Gani Ilahude.

Table 1. Pressure Gauge Locations

Date	Location	Latitude	Longitude
29 Nov 30 Nov 06 Dec 08 Dec 09 Dec 10 Dec 12 Dec 13 Dec	S. Ombai N. Ombai Dao (Roti) S. Sumba N. Sumba SE Sumbawa Lombok Bali	8 39.848 S 8 21.041 S 10 49.04 S 10 15.29 S 9 22.925 S 8 47.704 S 8 20.263 S 8 24.155 S	125 06.614 E 125 04.415 E 122 41.07 E (Ship pos: radar 240@0.24 nm) 120 31.40 E (Ship pos: radar 279@0.65 nm) 119 12.219 E 118 57.025 E 116 2.286 E 115 42.602 E

Table 2. ADCP Surveys

Dates	Location		
4-6 Dec	Timor Passage		
6-7 Dec	Roti-Savu-Sumba		
8-9 Dec	S Sumba-N Sumba		
9-10 Dec	Selat Sumba/ Selat Sape		
10-11 Dec	Selat Sumba		
11-12 Dec	Transit to Lombok/ Selat Alas		
12-13 Dec	Selat Lombok		

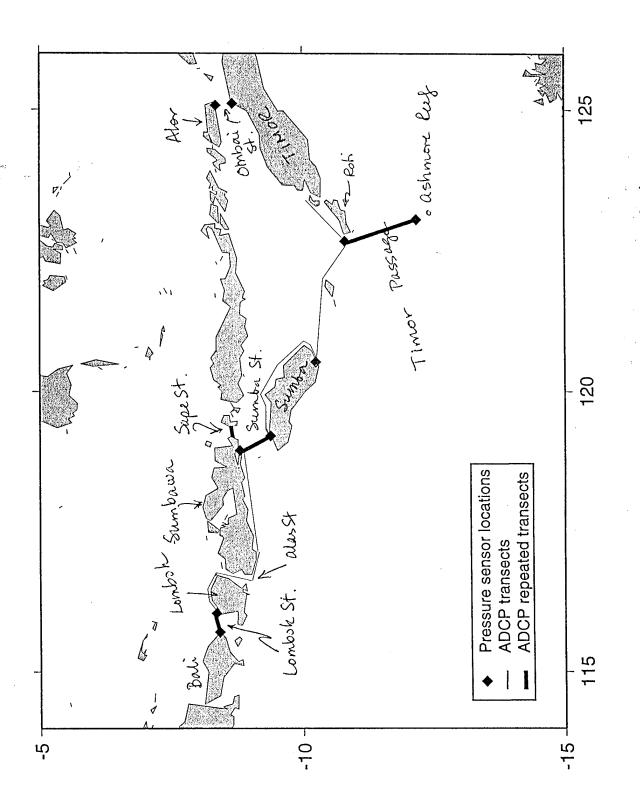


Figure 1. Cruise track for the Shallow Pressure Cruise

